


**FIXED MOUNT THERMAL IMAGING
CAMERA FOR CONDITION MONITORING
AND EARLY FIRE DETECTION**

FLIR A500f/A700f



FLIR A500f and A700f Advanced Smart Sensor Thermal Cameras are ideal for users who want built-in temperature analytics and alarms for outdoor condition monitoring and early fire detection applications. These cameras feature a protective housing that can withstand temperatures between -30 to 50°C, which provides a high level of protection against challenging environmental conditions and secures the sensor from theft. FLIR A500f/A700f cameras offer high-resolution thermal imaging paired with edge computing and industrial internet of things (IIoT) for simplified inclusion in new or existing networks. For VMS integrations, thermal and visible streams can be viewed independently or simultaneously. The cameras are easy to add, set up, and operate in HMI/SCADA systems, offering automation system solution providers a running start. FLIR A500f/A700f cameras can help companies protect assets, improve safety, maximize uptime, and minimize maintenance costs.

flir.com/a500f-a700f

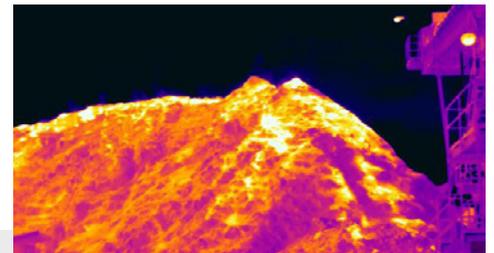

SIMPLIFY INTEGRATION

FLIR A500f/A700f cameras provide communication and control options that allow easy integration into existing monitoring systems

- HMI/SCADA-compatible using Modbus TCP client & server and Ethernet/IP
- ONVIF S compliant and integrates into standard security VMS and NVR solutions including control of pan/tilts
- Ready for the fourth industrial revolution, with support for widely adopted IIoT protocols such as MQTT and REST API, in both XML and JSON format

BEST-IN-CLASS OPERATIONAL FEATURES

Tailor thermal imaging monitoring to meet any site's unique requirements

- Improve definition of areas of interest or object curvatures using polygon, polyline, and line function
- Integrate into industrial automation systems using analog and digital control thanks to superior I/O control via Modbus TCP Client and Server, Ethernet IP, REST API, and MQTT
- Conserve network bandwidth with compressed radiometric streaming to FLIR Atlas SDK

UNMATCHED THERMAL IMAGING

Deliver consistent, accurate results in harsh conditions

- Provides superior image quality with up to 640 × 480 (307,200 pixels) thermal resolution
- Increase contrast in even-temperature scenes and enhance edge detail in low light using FSX® (Flexible Scene Enhancement) technology
- Ensure temperature accuracy of objects at different distances using remote motor focus via Ethernet communication

SPECIFICATIONS

System Overview		A500f	A700f
IR Resolution		464 × 348 (161,472 pixels)	640 × 480 (307,200 pixels)
Visual Resolution		1280 × 960	
Detector Pitch		17 μm	12 μm
MSX® & FSX®		Yes	
Available Field of Views		14°, 24°, 42° athermalized lens	
Focal Plane Array [FPA]		Uncooled microbolometer	
Focus		Motorized focus, manual & on-command automatic (scene contrast method)	
Image Frequency		30 Hz	
Image Storage		Records up to 100 FLIR radiometric JPEG; storage as function of: alarm, scheduling, or user interaction (camera web)	
Measurement			
Object Temperature Range		-20 to 120°C (-4 to 248°F), 0 to 650°C (32 to 1202°F), 300 to 1500°C (572 to 2732°F)	20°C to 120°C (-4°F to 248°F), 0°C to 650°C (32°F to 1202°F), 300°C to 2000°C (572°F to 3632°F)
Accuracy		±2°C (±3.6°F) or ±2% of reading, for ambient temperature 15°C-35°C (59°F-95°F) and object temperature above 0°C (32°F)	
Readout		Measurement results: Ethernet/IP, Modbus TCP server (pull), Modbus TCP client (push), MQTT (push), REST API (GET/POST), measurements and still image (radiometric JPEG, visual 640 × 480, visual 1280 × 960), web interface	
Automatic Hot and Cold Detection		Max./min. temperature value and position shown within box	
Measurement Presets		Yes	
Measurement Tools		10 spotmeters, 10 boxes or mask polygons, 3 Deltas (difference any value/reference/external lock), 2 isotherms (above/below/interval), 2 iso-coverage, 1 reference temperature, 2 lines, 1 polyline, Maximum 12 measurement functions at the same time	
Web Interface		Yes	
Multi Streaming		Yes	
Alarm			
Alarm Functions		On any selected measurement function, digital in, and internal camera temperature	
Alarm Output		Digital out, e-mail (SMTP) (push), Ethernet/IP, file transfer (FTP) (push), Modbus TCP server (pull), MQTT (push), query over RESTful API (pull), store image or video	
Encoding		Video stream: H.264, MPEG4, or MJPEG Radiometric stream: Compressed JPEG-LS over RTSP	
Digital Input/Output			
Digital I/O Connector Type		Terminal block inside housing	
Digital I/O Isolation Voltage		500 VRMS	
Digital Input Purpose		NUC, NUC disable, alarm	
Digital Inputs		2x opto-isolated, Vin(low)= 0–1.5 V, Vin(high)= 3–25 V	
Digital Output Purpose		As a function of alarm, output to external device, Fault (NC)	
Digital Outputs		3x opto-isolated, 0–48 V DC, max. 350 mA; solid-state opto relay; 1x dedicated as Fault output (NC)	
Cable Glands		1x M12, 1x M16, 1x M20	
Ethernet			
Ethernet		For control, result, image, and power	
Ethernet Communication		TCP/IP socket-based FLIR proprietary	
Ethernet Connector Type		IP67 rated RJ45 port	
Ethernet Interface		Wired	
Ethernet Power		Power over Ethernet, PoE IEEE 802.3af class 3 EtherNet/IP, IEEE 1588, Modbus TCP, MQTT, SNMP, TCP, UDP, SNTP, RTSP, RTP, HTTP, HTTPS, ICMP, IGMP, sftp (server), FTP (client), SMTP, DHCP, MDNS (Bonjour), uPnP, PoE injector sold separately	
Environmental Data			
Operating Temperature Range		-30°C to 50°C (-22°F to 122°F)	
EMC		EN50130-4, EN61000-6-3, EN55022 Class B, FCC Part. 15 Class B	
Encapsulation		IP67	
Physical Data			
Packaging Size [L x W x H]		62 × 20.2 × 22 cm (24.41 × 7.92 × 8.66 in)	
Size [L x W x H]		51.5 × 17.7 × 22.9 cm (20.28 × 6.97 × 9.02 in)	
Mounting		Sold separately, pole and wall adapters available	
Housing Material		Aluminum housing, sunshield in ABS	
System Features			
Heater		8W, electronically controlled, T_ON 20°C ±2°C (68°F ±4°F), T_OFF 23°C ±2°C (73.4°F ±4°F)	
ONVIF Conformance		Yes. ONVIF Profile S	
Window Transmission		Automatic, based on window temperature	
Power Consumption		30W PoE, PoE+, Type 2. IEEE 802.3af, IEEE 802.3at/PoE Plus	

For a complete, up-to-date list of specifications, go to flir.com/a500f-a700f

WILSONVILLE
27700 SW Parkway Ave.
Wilsonville, OR 97070
USA
PH: +1 877.773.3547

EUROPE
Luxemburgstraat 2
2321 Meer
Belgium
PH: +32 2 896 29 05

HONG KONG
Room 1613-15, Tower 2
Grand Central Plaza
138 Shatin Rural Committee Rd
Shatin, N.T.
PH: +852 27 92 89 55

LATIN AMERICA
Av. Antonio Bardella, 320
Sorocaba, SP 18085-852
Brasil
PH: +55 15 3238 8070

www.teledyneflir.com

Equipment described herein is subject to US export regulations and may require a license prior to export. Diversion contrary to US law is prohibited. Imagery for illustration purposes only. Specifications are subject to change without notice. ©2021 Teledyne FLIR LLC. All rights reserved. Created: 05/12/2021

21-0445-INS-AUT-A500F-A700F-Datasheet - A4

 **TELEDYNE FLIR**
Everywhere you look™