


C.A 10001

Waterproof pH/temperature tester

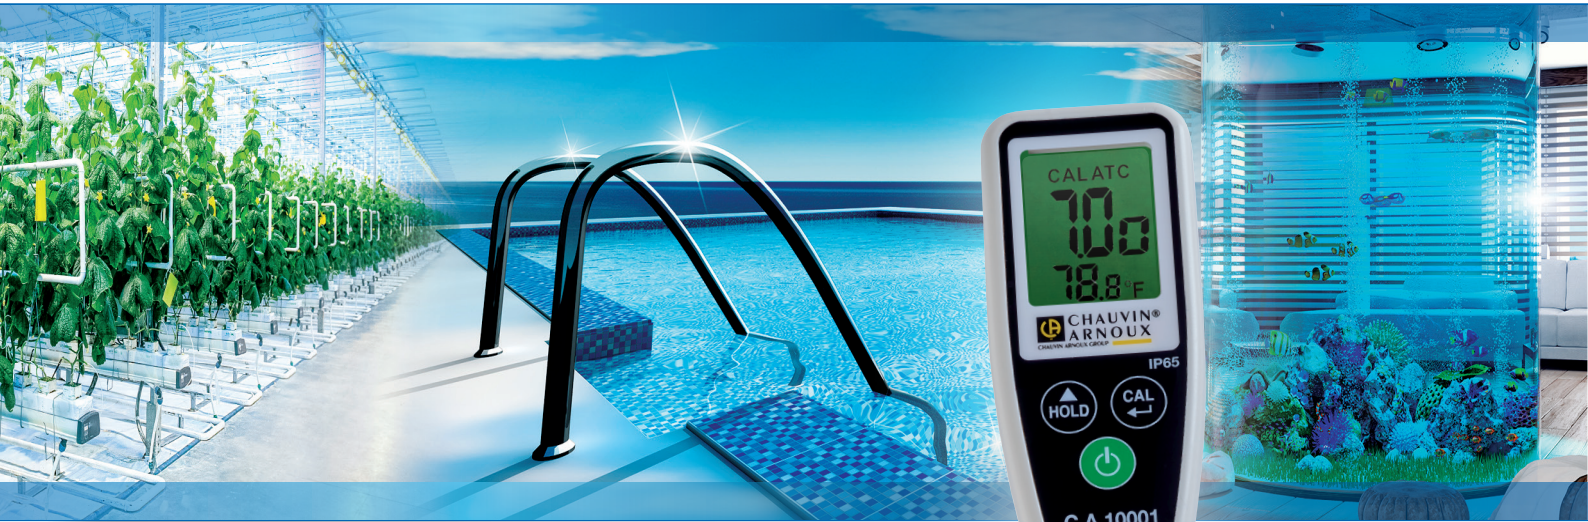

1 click to calibrate, 1 click to measure!

Quick pH testing

Automatic, extremely simple 3-point calibration saves time!

Detection of temperature-compensated pH values (ATC)

Practical pocket format for mobile applications, in the field or in the lab.

Long pH electrode suitable for measurements in small-diameter recipients: vials, sample tubes, test tubes, etc.



Measure up



C.A 10001: IT BECOMES DIFFICULT TO DO WITHOUT IT!

Low battery indicator

Battery-charge warning icon

HOLD key to freeze the measurement

Electrode

- Combined with a built-in temperature sensor
- 12 cm long
- Plastic body to limit the risk of breakage
- Non-rechargeable gel reference system

Waterproof, IP65
"All-terrain" use

Wide multi-parameter screen

Simultaneous display of the pH and temperature (°C or °F)
0.01 pH resolution

ATC (Automatic Temperature Compensation) mode

Automatic display of the pH value compensated for temperature from 0 to 60 °C (32 to 140 °F)

Automatic calibration with a single press on the CAL key

One click per pH buffer
Automatic calibration (up to 3 points) with recognition of the buffers

Applications

Hydroponics, swimming pools /spas, education, water treatment, drinking water, aquariums, beverages industry, use in the field, laboratory

TECHNICAL SPECIFICATIONS

| | pH | TEMPERATURE |
|---------------------------|---|---------------------------------|
| Measurement ranges | 0.00 - 14.00 pH | 0.0 - 60.0 °C / 32.0 - 140.0 °F |
| Resolution | 0.01 pH | 0.1 °C / 0.1 °F |
| Error | ± 0.1 pH | ± 1 °C / ± 2 °F |
| Calibration | Automatic: 1, 2 or 3 points: buffers memorized | |
| Interchangeable electrode | no | |
| Power supply/Life span | 2 x CR2032 3V batteries / >100 hours | |
| Auto power-off | After 20 min without use | |
| Dimensions/weight | 227 x 36 x 20 mm / 65 g (with batteries) | |
| Environment | Operating range 0 to 50°C, Relative Humidity 80% max. Storage temperature range -10 to +50°C, Relative Humidity 90% max. | |
| Warranty | 1 year | |



State at delivery

Delivered in a cardboard box with:

- two CR2032 3V batteries,
- a storage flask for the electrode,
- a multilingual user's manual
- a verification certificate.



To order

C.A 10001 pH/Temp. tester.....P01710015

ACCESSORIES

pH 4.01 buffer solution (NIST)*, 125 mLP01700106
pH 7.00 buffer solution (NIST), 125 mL.....P01700107
pH 10.01 buffer solution (NIST), 125 mLP01700109
Set of 3 plastic beakers.....P01710056

* Solution delivered with a quality certificate guaranteeing compliance with the NIST (US National Institute of Standards and Technology) and DIN 19266 standards

To see our full range of electrodes and temperature sensors, please visit our website at www.chauvin-arnoux.com

FRANCE
Chauvin Arnoux
190, rue Championnet
75876 PARIS Cedex 18
Tel: +33 1 44 85 44 38
Fax: +33 1 46 27 95 59
export@chauvin-arnoux.fr
www.chauvin-arnoux.com

UNITED KINGDOM
Chauvin Arnoux LTD
Unit 1 Nelson Ct, Flagship Sq, Shaw Cross Business Pk
Dewsbury, West Yorkshire - WF12 7TH
Tel: +44 1924 460 494
Fax: +44 1924 455 328
info@chauvin-arnoux.co.uk
www.chauvin-arnoux.com

MIDDLE EAST
CHAUVIN ARNOUX MIDDLE EAST
P.O. BOX 60-154
1241 2020 JAL EL DIB - LEBANON
Tel: +961 1 890 425
Fax: +961 1 890 424
camie@chauvin-arnoux.com
www.chauvin-arnoux.com

CHAUVIN ARNOUX
GROUP